

9-651/307/437-1013 99-04 Ford Lightning and 02-3 Ford F150 Harley Davidson Edition DW65c/300c/430c Fuel Pump Installation Guide




Parts List:

- DW65c/300c/430c (x2), 9-651/9-307/9-437 (x2)
- Fuel Hose (x2)
- Fuel Sock (x2)
- 5/16" Hose Clamp (x4)


99-04 Ford Lightning DW65c/300c/430c Fuel Pump Installation Guide**99-04 Ford Lightning DW65c/300c/430c Fuel Pump Install**

PLEASE READ – this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the fuel pump assembly from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction. The DW400 pump has a larger body than most in-tank pumps it will replace. Some cutting of the assembly should be expected for proper fitment


Below is a picture of suggested tools that will make the installation process easier

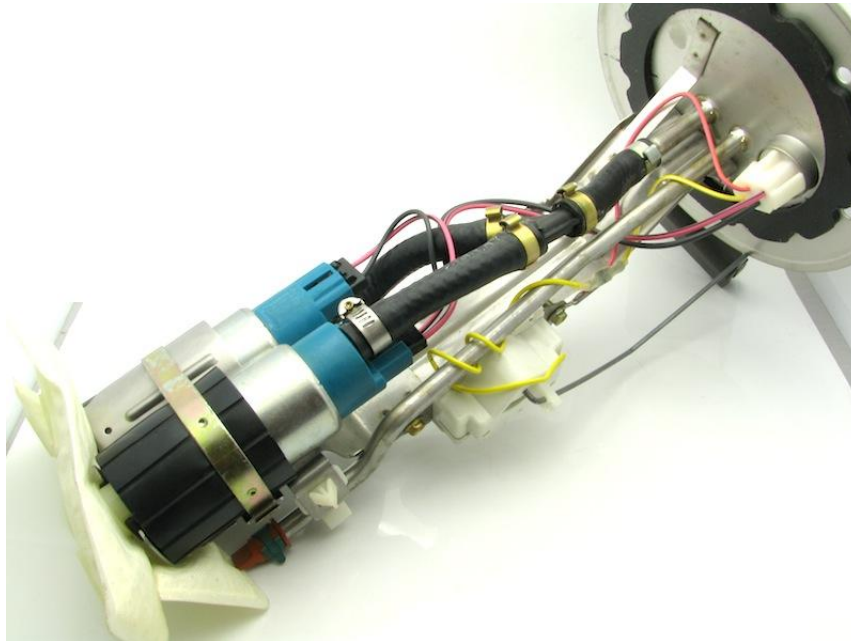

1 – remove the pump retaining strap

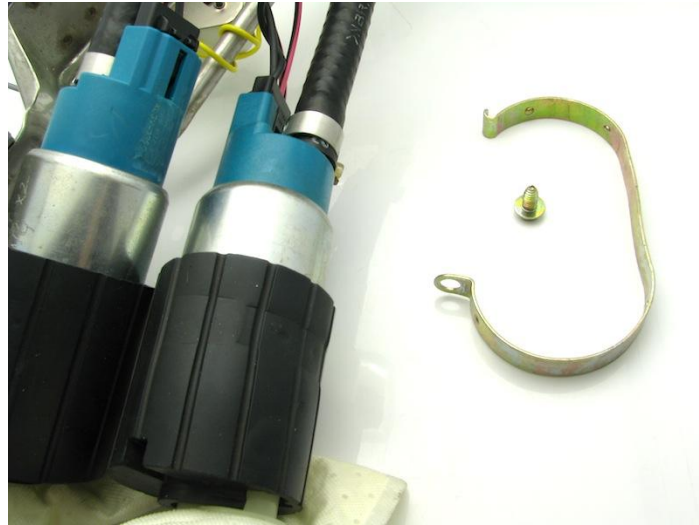

2 – loosen the OE hose clamps from both pumps and remove the pumps

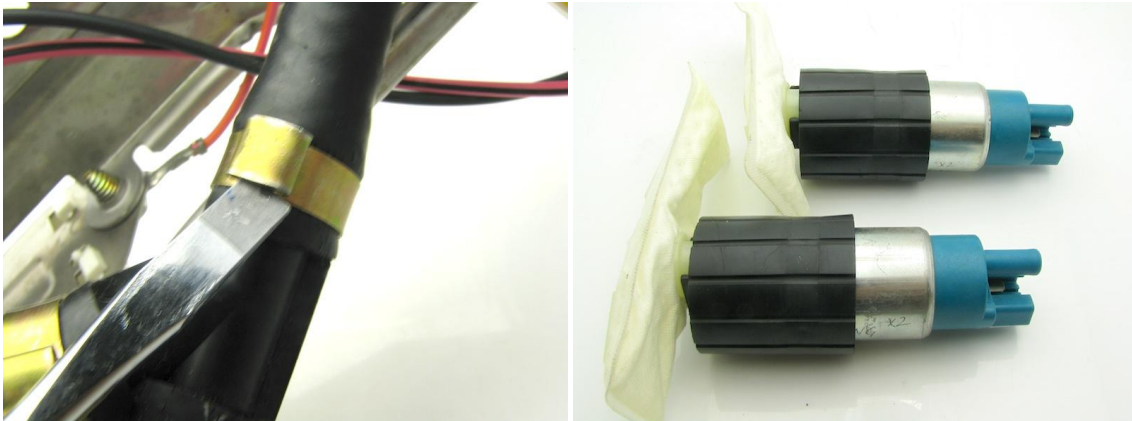


3 – reuse the pump isolators and install the fuel sock and sock retainer




99-04 Ford Lightning DW65c/300c/430c Fuel Pump Installation Guide

4 – install DW65c/300c pump and connect the hoses and electrical connectors

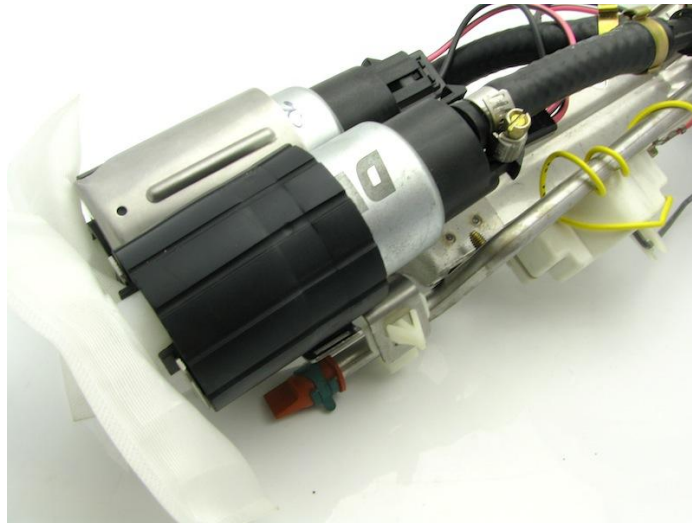

5 – install the pump retaining strap

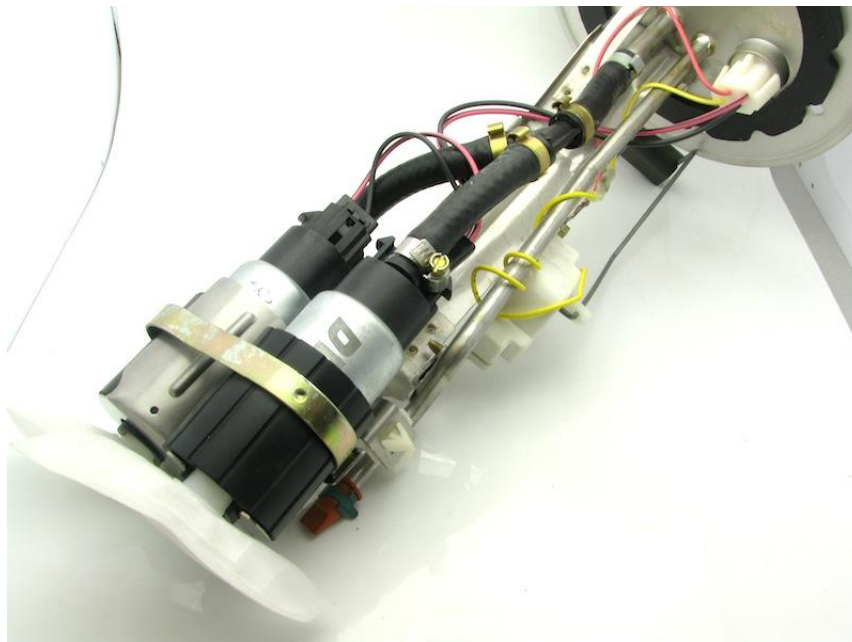

6 – reinstall the assembly into the fuel tank and attach a length of hose to the outlet of the pump assembly allowing it to drain into a fuel safe container and prime the fuel pump assembly

7 – cycle the key to the on position as many times as required to prime the pump assembly and evacuate the air introduced during the pump installation process

8 – attach supply line to the outlet of the pump assembly